



THERMINOL[®] VP-1

heat transfer fluid


Ultrahigh-temperature,
vapor/liquid phase fluid

12° to 400°C
(54° to 750°F)

THERMINOL.
Heat transfer fluids by Eastman

THERMINOL® VP-1

heat transfer fluid

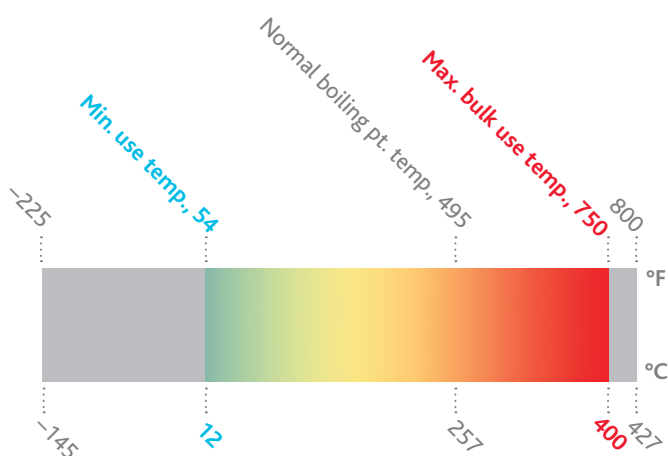

Eastman Therminol® VP-1 heat transfer fluid is specifically designed to meet the demanding requirements of vapor phase systems. It combines exceptional heat stability and low viscosity for efficient, dependable, uniform performance in a wide optimum use range.

Therminol VP-1 is available globally. Contact your local Eastman Therminol sales representative for more information.

For more information about vapor phase system design, operation, and safety, refer to the *Vapor phase design guide* or the Therminol VP-1 safety data sheet (SDS).

Physical and chemical characteristics

Therminol VP-1 is usable as a liquid or as a boiling-condensing heat transfer medium up to 400°C (750°F). It is miscible and interchangeable (for top-up or design purposes) with other similarly constituted diphenyl oxide/biphenyl fluids.

Therminol VP-1 has a low viscosity between its melting point (12°C/54°F) and the temperature at which it vaporizes (257°C/495°F). In geographic areas where the system may be exposed to temperatures below this level, all piping that may contain the fluid in its liquid state should be heat traced.

The recommended maximum bulk and film temperatures for Therminol VP-1 are based on industry-standard thermal studies. Operation at or below these temperature maximums can provide long service life under most operating conditions.

Actual fluid life is dependent on the total system design and operation and can vary by heat transfer fluid chemistry. As fluid ages under normal operating conditions, a vapor phase fluid will accumulate low-boiling contaminants such as air, water, and degradation products. These noncondensables should be vented from the system as necessary to a safe location away from personnel and sources of ignition and in compliance with applicable regulations and laws. Venting noncondensables is also necessary to avoid aberrations in temperature control. Each user or group of users, if arranged in series that operate after the same control valve, should have at least one vapor accumulator (VA) installed for detecting and venting noncondensables. This is especially true if close temperature control is needed.


Therminol VP-1 is exceptionally heat stable. However, care must be taken to avoid overheating, which could lead to deposition of solids on the heating surfaces of the vaporizer. Circulation rates in the heater should be selected to limit skin temperatures to reasonable values, with due consideration to the cost of replacing damaged fluid and the cost of maintaining an adequate heat flux. This is normally accomplished by the vaporizer or heater manufacturer in the course of recommending a particular unit and stipulating its operating parameters.

Typical properties^a

Appearance	Clear, water-white liquid
Composition	Biphenyl/diphenyl oxide (DPO) eutectic mixture
Maximum bulk temperature	400°C (750°F)
Maximum film temperature	430°C (800°F)
Normal boiling point	257°C (495°F)
Crystallizing point	12°C (54°F)
Flash point, COC (ASTM D92)	124°C (255°F)
Flash point, PMCC (ASTM D93)	110°C (230°F)
Autoignition temperature (ASTM E659)	601°C (1114°F)
Autoignition temperature (DIN 51794)	621°C (1150°F)
Coefficient of thermal expansion at 200°C	0.000979/°C (0.000544/°F)
Heat of vaporization at maximum use temperature	206 kJ/kg (88.7 Btu/lb)
Total acidity (ASTM D664)	<0.2 mg KOH/g
Average molecular weight	166
Pseudocritical temperature	499°C (930°F)
Pseudocritical pressure	33.1 bar (480 psia)
Pseudocritical density	327 kg/m ³ (20.4 lb/ft ³)
Sulfur content (ASTM D7691)	<10 ppm
Copper corrosion (ASTM D130)	<<1a
Moisture content, maximum (ASTM E203)	300 ppm
Volume contraction on freezing	6.27%
Volume expansion on melting	6.69%
Surface tension in air at 25°C	36.6 dynes/cm
Dielectric constant @ 23°C (ASTM D924)	3.35

^aThese data are based on samples tested in the laboratory and are not guaranteed for all samples. Contact us for complete sales specifications for Therminol VP-1 fluid. Does not constitute an express warranty. See disclaimer on the back page of this bulletin.

Heat transfer fluid calculators

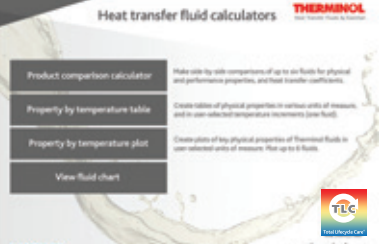

EASTMAN

THERMINOL
The Performance Advantage

TTC
Thermal Transfer Center

www.therminol.com

To create your own customized table

with preferred properties, units of measure,
and temperature intervals, visit

Therminol.com/resources

and download the Therminol heat transfer fluid calculator.

For technical service, visit the contact page of our website, **Therminol.com**.

Liquid properties of Therminol® VP-1 heat transfer fluid by temperature^a (SI UNITS)

Temperature		Liquid density	Liquid heat capacity	Heat of vaporization	Liquid enthalpy ^b	Liquid thermal conductivity	Liquid viscosity ^c		Vapor pressure ^d
°C	°F	kg/m ³	kJ/(kg·K)	kJ/kg	kJ/kg	W/(m·K)	cP (mPa·s)	cSt (mm ² /s)	kPa
12	54	1070	1.523	419.0	0.0	0.1370	5.48	5.12	—
20	68	1064	1.546	414.7	12.3	0.1363	4.29	4.03	0.001
30	86	1056	1.575	409.3	27.9	0.1353	3.28	3.11	0.004
40	104	1048	1.604	403.9	43.8	0.1344	2.60	2.48	0.009
50	122	1040	1.633	398.6	60.0	0.1333	2.12	2.03	0.019
60	140	1032	1.662	393.3	76.4	0.1323	1.76	1.71	0.041
70	158	1024	1.690	388.1	93.2	0.1312	1.49	1.46	0.081
80	176	1015	1.719	382.9	110.2	0.1300	1.28	1.26	0.153
90	194	1007	1.747	377.8	127.6	0.1289	1.12	1.11	0.276
100	212	999	1.775	372.7	145.2	0.1277	0.985	0.986	0.477
110	230	991	1.803	367.6	163.1	0.1264	0.875	0.884	0.795
120	248	982	1.831	362.6	181.2	0.1252	0.784	0.798	1.28
130	266	974	1.858	357.5	199.7	0.1239	0.707	0.726	2.00
140	284	965	1.886	352.6	218.4	0.1225	0.642	0.665	3.05
150	302	957	1.913	347.6	237.4	0.1212	0.585	0.612	4.52
160	320	948	1.941	342.7	256.7	0.1197	0.537	0.566	6.56
170	338	940	1.968	337.7	276.2	0.1183	0.494	0.526	9.31
180	356	931	1.995	332.8	296.0	0.1168	0.457	0.491	13.0
190	374	922	2.021	327.9	316.1	0.1153	0.424	0.460	17.8
200	392	913	2.048	323.0	336.5	0.1138	0.395	0.432	23.9
210	410	904	2.075	318.0	357.1	0.1122	0.368	0.407	31.7
220	428	895	2.101	313.0	378.0	0.1106	0.345	0.385	41.5
230	446	886	2.128	308.0	399.1	0.1089	0.324	0.366	53.6
240	464	877	2.154	303.0	420.5	0.1072	0.305	0.348	68.4
250	482	867	2.181	297.9	442.2	0.1055	0.288	0.332	86.3
260	500	857	2.207	292.7	464.1	0.1038	0.272	0.317	108
270	518	848	2.234	287.5	486.3	0.1020	0.258	0.304	133
280	536	838	2.260	282.2	508.8	0.1002	0.244	0.292	163
290	554	827	2.287	276.8	531.6	0.0983	0.232	0.281	198
300	572	817	2.314	271.2	554.6	0.0964	0.221	0.271	239
310	590	806	2.341	265.6	577.8	0.0945	0.211	0.262	286
320	608	796	2.369	259.7	601.4	0.0925	0.202	0.254	340
330	626	784	2.397	253.8	625.2	0.0905	0.193	0.246	401
340	644	773	2.425	247.6	649.3	0.0885	0.185	0.239	470
350	662	761	2.454	241.3	673.7	0.0864	0.177	0.233	548
360	680	749	2.485	234.7	698.4	0.0843	0.170	0.227	635
370	698	736	2.517	227.8	723.4	0.0822	0.164	0.222	732
380	716	723	2.551	220.7	748.7	0.0800	0.158	0.218	840
390	734	709	2.588	213.2	774.4	0.0778	0.152	0.214	959
400	752	694	2.628	205.3	800.5	0.0756	0.146	0.211	1090
410	770	679	2.674	197.0	827.0	0.0733	0.141	0.208	1230
420	788	662	2.729	188.0	854.0	0.0710	0.137	0.206	1390

^aMaximum recommended bulk temperature 400°C (750°F). These data are based on samples tested in the laboratory and are not guaranteed for all samples. Contact us for complete sales specifications for Therminol VP-1 fluid. ^bThe enthalpy basis is liquid at the crystallizing point 12°C (53.6°F). ^c1 cSt = 1 mm²/s and 1 mPa·s = 1 cP ^d100 kPa = 1 bar

Liquid properties of Therminol® VP-1 heat transfer fluid by temperature^a (ENGLISH UNITS)

Temperature		Liquid density		Liquid heat capacity	Heat of vaporization	Liquid enthalpy ^b	Liquid thermal conductivity	Liquid viscosity ^c		Vapor pressure ^d
°F	°C	lb/gal	lb/ft ³	Btu/(lb·°F)	Btu/lb	Btu/lb	Btu/(ft·h·°F)	lb/(ft·h)	cSt (mm ² /s)	psia
54	12	8.93	66.8	0.364	180.2	0.1	0.0792	13.2	5.08	—
60	16	8.91	66.7	0.366	179.4	2.3	0.0790	11.8	4.58	—
80	27	8.84	66.1	0.374	176.8	9.7	0.0784	8.64	3.37	—
100	38	8.76	65.5	0.382	174.3	17.3	0.0778	6.60	2.60	0.001
120	49	8.69	65.0	0.390	171.7	25.0	0.0772	5.23	2.08	0.003
140	60	8.61	64.4	0.397	169.2	32.9	0.0765	4.26	1.71	0.006
160	71	8.53	63.8	0.405	166.7	40.9	0.0758	3.55	1.43	0.013
180	82	8.46	63.3	0.412	164.2	49.1	0.0750	3.01	1.23	0.025
200	93	8.38	62.7	0.420	161.8	57.4	0.0743	2.59	1.07	0.048
220	104	8.31	62.1	0.427	159.4	65.9	0.0735	2.26	0.938	0.087
240	116	8.23	61.5	0.435	156.9	74.5	0.0727	1.99	0.834	0.151
260	127	8.15	61.0	0.442	154.5	83.3	0.0719	1.77	0.749	0.251
280	138	8.07	60.4	0.449	152.2	92.2	0.0710	1.59	0.677	0.404
300	149	7.99	59.8	0.457	149.8	101.2	0.0701	1.43	0.617	0.629
320	160	7.91	59.2	0.464	147.4	110.4	0.0692	1.30	0.566	0.951
340	171	7.83	58.6	0.471	145.1	119.8	0.0683	1.18	0.522	1.40
360	182	7.75	58.0	0.478	142.7	129.3	0.0674	1.09	0.483	2.02
380	193	7.67	57.4	0.485	140.4	138.9	0.0664	1.00	0.450	2.85
400	204	7.59	56.8	0.492	138.0	148.7	0.0654	0.926	0.421	3.94
420	216	7.50	56.1	0.499	135.6	158.6	0.0644	0.859	0.395	5.35
440	227	7.42	55.5	0.506	133.2	168.7	0.0633	0.800	0.372	7.15
460	238	7.33	54.9	0.514	130.8	178.9	0.0622	0.747	0.352	9.41
480	249	7.25	54.2	0.521	128.4	189.2	0.0611	0.700	0.333	12.2
500	260	7.16	53.5	0.528	125.9	199.7	0.0600	0.658	0.317	15.6
520	271	7.06	52.8	0.535	123.4	210.3	0.0589	0.620	0.303	19.8
540	282	6.97	52.2	0.542	120.9	221.1	0.0577	0.585	0.289	24.8
560	293	6.88	51.4	0.549	118.3	232.0	0.0565	0.553	0.277	30.7
580	304	6.78	50.7	0.556	115.6	243.0	0.0553	0.524	0.267	37.6
600	316	6.68	50.0	0.563	112.9	254.2	0.0540	0.498	0.257	45.7
620	327	6.58	49.2	0.571	110.0	265.5	0.0527	0.474	0.248	55.1
640	338	6.47	48.4	0.578	107.1	277.0	0.0514	0.451	0.241	65.8
660	349	6.36	47.6	0.586	104.1	288.7	0.0501	0.431	0.234	78.1
680	360	6.25	46.7	0.594	101.0	300.5	0.0488	0.412	0.227	92.1
700	371	6.13	45.9	0.602	97.7	312.4	0.0474	0.394	0.222	108
720	382	6.01	44.9	0.612	94.2	324.6	0.0460	0.378	0.217	125
740	393	5.88	43.9	0.622	90.6	336.9	0.0446	0.363	0.213	145
760	404	5.74	42.9	0.633	86.8	349.4	0.0431	0.349	0.210	167
780	416	5.59	41.8	0.646	82.6	362.2	0.0417	0.335	0.207	191
800	427	5.43	40.6	0.662	78.1	375.3	0.0402	0.323	0.205	218

^aMaximum recommended bulk temperature 400°C (750°F). These data are based on samples tested in the laboratory and are not guaranteed for all samples. Contact us for complete sales specifications for Therminol VP-1 fluid. ^bThe enthalpy basis is liquid at the crystallizing point 12°C (53.6°F). ^c1 cSt = 1 mm²/s and 1 mPa·s = 1 cP ^d100 kPa = 1 bar

Vapor properties of Therminol® VP-1 heat transfer fluid by temperature^a (SI UNITS)

Temperature		Vapor density	Vapor heat capacity	Vapor enthalpy ^b	Vapor thermal conductivity	Vapor viscosity ^c	
°C	°F	kg/m ³	kJ/(kg·K)	kJ/kg	W/(m·K)	mPa·s	cSt
12	54	—	0.976	419.0	0.0081	0.0057	—
20	68	—	1.00	427.0	0.0085	0.0059	—
30	86	0.00023	1.04	437.2	0.0090	0.0061	—
40	104	0.00055	1.07	447.7	0.0095	0.0063	—
50	122	0.00120	1.10	458.6	0.0100	0.0065	—
60	140	0.00245	1.14	469.8	0.0105	0.0067	2720
70	158	0.00473	1.17	481.3	0.0110	0.0069	1450
80	176	0.00866	1.20	493.2	0.0116	0.0071	817
90	194	0.0152	1.23	505.3	0.0121	0.0073	479
100	212	0.0256	1.27	517.8	0.0126	0.0075	293
110	230	0.0415	1.30	530.7	0.0132	0.0077	185
120	248	0.0651	1.33	543.8	0.0137	0.0079	121
130	266	0.0994	1.36	557.2	0.0143	0.0081	81.5
140	284	0.148	1.39	571.0	0.0148	0.0083	56.3
150	302	0.214	1.42	585.0	0.0154	0.0085	39.8
160	320	0.303	1.45	599.4	0.0160	0.0087	28.8
170	338	0.422	1.48	614.0	0.0166	0.0089	21.2
180	356	0.575	1.51	628.9	0.0171	0.0091	15.9
190	374	0.771	1.54	644.0	0.0177	0.0094	12.1
200	392	1.02	1.57	659.4	0.0183	0.0096	9.38
210	410	1.33	1.60	675.1	0.0189	0.0098	7.36
220	428	1.71	1.63	691.0	0.0195	0.0100	5.85
230	446	2.17	1.66	707.1	0.0201	0.0102	4.70
240	464	2.72	1.68	723.5	0.0207	0.0104	3.82
250	482	3.38	1.71	740.1	0.0213	0.0106	3.13
260	500	4.17	1.74	756.9	0.0219	0.0108	2.59
270	518	5.09	1.77	773.8	0.0226	0.0110	2.16
280	536	6.17	1.79	791.0	0.0232	0.0112	1.82
290	554	7.42	1.82	808.3	0.0238	0.0114	1.54
300	572	8.86	1.84	825.8	0.0245	0.0116	1.31
310	590	10.5	1.87	843.4	0.0251	0.0118	1.13
320	608	12.4	1.90	861.1	0.0258	0.0120	0.970
330	626	14.6	1.92	879.0	0.0264	0.0122	0.841
340	644	17.0	1.95	896.9	0.0271	0.0124	0.731
350	662	19.8	1.97	915.0	0.0277	0.0126	0.639
360	680	22.9	2.00	933.1	0.0284	0.0129	0.560
370	698	26.5	2.03	951.3	0.0291	0.0131	0.493
380	716	30.5	2.05	969.5	0.0298	0.0133	0.435
390	734	35.0	2.08	987.7	0.0304	0.0135	0.384
400	752	40.1	2.11	1005.8	0.0311	0.0137	0.341
410	770	45.8	2.14	1024.0	0.0318	0.0139	0.302
420	788	52.4	2.17	1042.0	0.0325	0.0140	0.268

^aMaximum recommended bulk temperature 400°C (750°F). Vapor properties given for saturated vapor. These data are based on samples tested in the laboratory and are not guaranteed for all samples. Contact us for complete sales specifications for Therminol VP-1 fluid. ^bThe enthalpy basis is liquid at the crystallizing point 12°C (53.6°F). ^c1 cSt = 1 mm²/s and 1 mPa·s = 1 cP

Vapor properties of Therminol® VP-1 heat transfer fluid by temperature^a (ENGLISH UNITS)

Temperature		Vapor density	Vapor heat capacity	Vapor enthalpy ^b	Vapor thermal conductivity	Vapor viscosity ^c	
°F	°C	lb/ft ³	Btu/(lb·°F)	Btu/lb	Btu/(ft·h·°F)	lb/(ft·h)	mPa·s
54	12	—	0.233	180.3	0.0047	0.0138	0.0057
60	16	—	0.236	181.8	0.0048	0.0140	0.0058
80	27	—	0.246	186.6	0.0051	0.0145	0.0060
100	38	—	0.253	191.6	0.0054	0.0150	0.0062
120	49	0.00007	0.263	196.8	0.0057	0.0156	0.0064
140	60	0.00015	0.272	202.1	0.0061	0.0161	0.0067
160	71	0.00032	0.280	207.6	0.0064	0.0167	0.0069
180	82	0.00061	0.289	213.3	0.0068	0.0172	0.0071
200	93	0.00113	0.299	219.2	0.0071	0.0178	0.0073
220	104	0.00199	0.306	225.2	0.0074	0.0183	0.0076
240	116	0.00334	0.315	231.4	0.0078	0.0189	0.0078
260	127	0.00541	0.323	237.8	0.0082	0.0194	0.0080
280	138	0.00846	0.332	244.3	0.0085	0.0200	0.0083
300	149	0.0128	0.339	251.0	0.0089	0.0205	0.0085
320	160	0.0189	0.347	257.8	0.0092	0.0211	0.0087
340	171	0.0273	0.356	264.8	0.0096	0.0217	0.0090
360	182	0.0384	0.363	272.0	0.0100	0.0222	0.0092
380	193	0.0529	0.370	279.3	0.0104	0.0228	0.0094
400	204	0.0717	0.378	286.7	0.0107	0.0233	0.0097
420	216	0.0954	0.387	294.2	0.0111	0.0239	0.0099
440	227	0.125	0.394	301.9	0.0115	0.0245	0.0101
460	238	0.162	0.402	309.7	0.0119	0.0250	0.0103
480	249	0.206	0.409	317.6	0.0123	0.0256	0.0106
500	260	0.260	0.416	325.6	0.0127	0.0261	0.0108
520	271	0.325	0.423	333.7	0.0131	0.0267	0.0110
540	282	0.401	0.430	341.9	0.0135	0.0272	0.0113
560	293	0.492	0.437	350.2	0.0139	0.0278	0.0115
580	304	0.597	0.445	358.6	0.0143	0.0284	0.0117
600	316	0.720	0.452	367.1	0.0147	0.0289	0.0119
620	327	0.862	0.457	375.6	0.0151	0.0295	0.0122
640	338	1.03	0.464	384.2	0.0156	0.0300	0.0124
660	349	1.22	0.471	392.8	0.0160	0.0305	0.0126
680	360	1.43	0.478	401.4	0.0164	0.0311	0.0129
700	371	1.68	0.485	410.1	0.0169	0.0316	0.0131
720	382	1.96	0.492	418.8	0.0173	0.0322	0.0133
740	393	2.29	0.500	427.5	0.0177	0.0327	0.0135
760	404	2.66	0.507	436.2	0.0182	0.0332	0.0137
780	416	3.08	0.516	444.8	0.0186	0.0338	0.0140
800	427	3.57	0.526	453.4	0.0191	0.0343	0.0142

^aMaximum recommended bulk temperature 400°C (750°F). Vapor properties given for saturated vapor. These data are based on samples tested in the laboratory and are not guaranteed for all samples. Contact us for complete sales specifications for Therminol VP-1 fluid. ^bThe enthalpy basis is liquid at the crystallizing point 12°C (53.6°F). ^c1 cSt = 1 mm²/s and 1 mPa·s = 1 cP



TLC Total Lifecycle Care[®] program

Eastman's TLC Total Lifecycle Care[®] program is designed to support Therminol customers throughout their systems' life cycle. This comprehensive program includes system design support, start-up assistance, training, sample analysis, flush and refill fluids, and our fluid trade-in program. In North America, call our hotline at 1-800-433-6997 or contact your local sales or technical representative.

In-service heat transfer fluid sample analysis—When Therminol heat transfer fluids are used within suggested temperature limits, they may provide years of trouble-free service. To help users get maximum life, Eastman offers testing of in-service heat transfer fluids to detect contamination, moisture, thermal degradation, and other conditions that may impact system performance. This comprehensive analysis includes acid number, kinematic viscosity, insoluble solids, low boilers, high boilers, and moisture content. Additional special analyses are available on request. Sample analysis includes sample collection kits that are easy to use. Most systems should be sampled annually. Users should also sample anytime a fluid-related problem is suspected.

FLUID GENIUS

Results of the test are presented in a detailed report that provides suggestions for corrective action. Test results are stored in a database for future reference. Customers can also access their specific test information via our new, advanced heat transfer fluid management platform, Fluid Genius™. It's a revolutionary patent-pending digital service that gives engineers and operations managers predictive insights to optimize heat transfer fluid performance—providing the ultimate edge. From sampling kits to expert guidance, our comprehensive service keeps you on track. Contact your account manager to get started on Fluid Genius—and keep your system up and running. To conduct your sample analysis, you will be provided with an all-inclusive, easy-to-use sample kit. Kit design may vary depending on fluid and shipping and lab requirements within the region. To learn more and request access to Fluid Genius, visit fluidgenius.net.

Technical service hotline—Experienced technical service specialists can help answer your questions regarding heat transfer fluid selection, system start-ups, system design, and operational issues.

System design support—Eastman regularly assists some of the world's largest engineering, chemical, and equipment manufacturing companies on the design and operation of heat transfer systems. Our liquid phase and vapor phase design guide information and system design data have been field tested in numerous installations. Eastman also conducts engineering seminars for customers, engineering firms, and equipment manufacturers to cover a wide range of heat transfer fluid system design and operation issues. Customers can request a technical service visit to audit heat transfer systems for fluid loss and leak prevention opportunities.

Operational training—Eastman believes that by sharing our experience with customers, we can help improve system design, promote safety, and reduce overall cost. Customers can take advantage of Eastman's heat transfer system operation and product training programs. These programs are customized to suit the varied needs of frontline technicians, operations supervisors, maintenance technicians, and design engineers. Customers can also receive training assistance for dealing with important topics like fluid safety and handling.

Safety awareness training—At Eastman, we're "All in for Safety." We provide our customers safety awareness training that focuses on the design, start-up, operation, and maintenance of heat transfer fluid systems.

Start-up assistance—Eastman provides start-up assistance by reviewing procedures and offering suggestions to reduce typical problems. Customers can also receive help by calling their local Eastman technical specialist or through on-site assistance.

Flush fluid and fluid refill—Liquid phase heat transfer systems can be cleaned with Therminol[®] FF flushing fluid. After the system is flushed, the appropriate liquid phase Therminol heat transfer fluid can be added.

Fluid trade-in program*—As part of our commitment to sustainability and the environment, Eastman offers a trade-in program for used Therminol and competitive heat transfer fluids. Depending on the fluid and its condition, it may be turned in for potential credit towards the purchase of new Therminol heat transfer fluid.

*Available in North America. Contact your local sales representative for more information.

For more information, visit Therminol.com.

EASTMAN

The results of insight™

Eastman Corporate Headquarters

P.O. Box 431
Kingsport, TN 37662-5280 U.S.A.

U.S.A. and Canada, 800-EASTMAN (800-327-8626)
Other locations, +(1) 423-229-2000

www.eastman.com/locations

Although the information and recommendations set forth herein are presented in good faith, Eastman Chemical Company ("Eastman") and its subsidiaries make no representations or warranties as to the completeness or accuracy thereof. You must make your own determination of its suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment, or formulation in conflict with any patent, and we make no representations or warranties, express or implied, that the use thereof will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS AND NOTHING HEREIN WAIVES ANY OF THE SELLER'S CONDITIONS OF SALE.

Safety Data Sheets providing safety precautions that should be observed when handling and storing our products are available online or by request. You should obtain and review available material safety information before handling our products. If any materials mentioned are not our products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be observed.

© 2022 Eastman. Eastman brands referenced herein are trademarks of Eastman or one of its subsidiaries or are being used under license. The ® symbol denotes registered trademark status in the U.S.; marks may also be registered internationally. Non-Eastman brands referenced herein are trademarks of their respective owners.